

erluna

cuadro twin
origin natural
high output

circular product






IP65
IP54



UK
CA

cuadro twin
origin natural high output

circular product

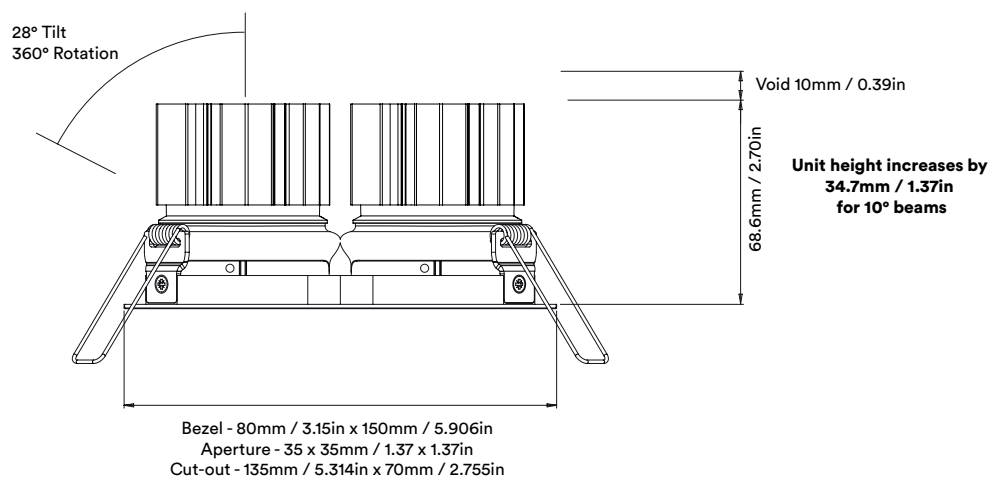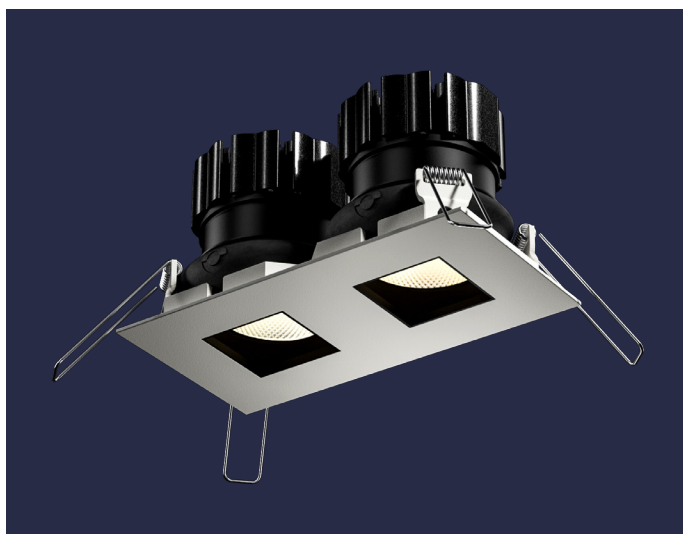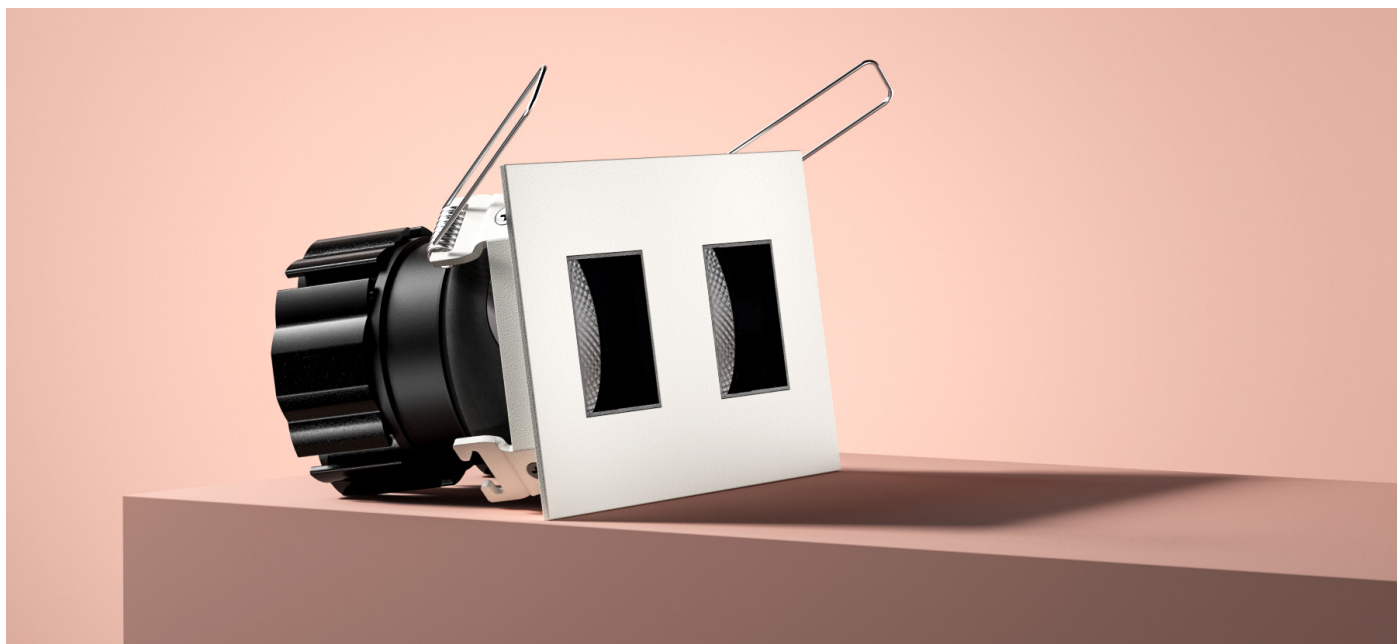

cuadro twin

origin natural high output

circular product

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



cuadro twin
origin natural high output

circular product

		2700K				
		SPOT	SOFT			
LIGHT VALUES	Spot	Narrow	Medium	Wide	Flood	
	Beam Width FWHM	10°	20°	26°	35°	50°
	Initial Lumens	953	1186	1186	1186	1186
	Engine Lumens	357	985	989	949	1023
	Luminaire Lumens	351	712	742	805	683
	Engine Lm/W	29	79	79	76	82
POWER	Luminaire Cd	9911	4463	2894	2209	1161
	Voltage	36V	34V			
	Drive Current	300mA	325mA			
Circuit Power (typ)		12.2W	12.5W			

		3000K				
		SPOT	SOFT			
LIGHT VALUES	Spot	Narrow	Medium	Wide	Flood	
	Beam Width FWHM	10°	20°	26°	35°	50°
	Initial Lumens	984	1233	1233	1233	1233
	Engine Lumens	368	998	1001	985	1060
	Luminaire Lumens	359	809	775	847	682
	Engine Lm/W	30	80	80	79	85
POWER	Luminaire Cd	9755	4616	2976	2269	1175
	Voltage	36V	34V			
	Drive Current	300mA	325mA			
Circuit Power (typ)		12.2W	12.5W			

Binning	SDCM (Hot)	2
	CRI (typ)(R9)	98 (99)
	TM30 Rf Rg	Rf 97.7 Rg 100.4
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
DRIVER	Protocols	Mains Dim / DALI / 0-10V / Non-dim
	Dim to Dark	0.1% Lux
	Distance from LED	20m / 65' (series wiring)
	Emergency	Emergency packs available

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
NH	- CD2 -	27	M	M	- W -	BB	- F 54 E
		27 / 2700K 30 / 3000K 40 / 4000K	M / Mains Dim D / DALI 0 / 0-10v N / Non Dim X / No Driver	S / Spot N / Narrow M / Medium W / Wide F / Flood	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic	WB / White RAL 9010 DB / White RAL 9003 BB / Black RAL 9005 CB / Other RAL GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic	F / 60 min Fire Rated Hood 54 / IP54 65 / IP65 P / Sea & Spa IP65 T / Lockable Tilt & Rotate E / 3hr Emergency H / Honeycomb N / Frosted Lens Z / LSZH Cable K / Click Connector

