



cloud pendant
for track 230v
origin
ultra output

circular product

cloud pendant for track 230v origin ultra output

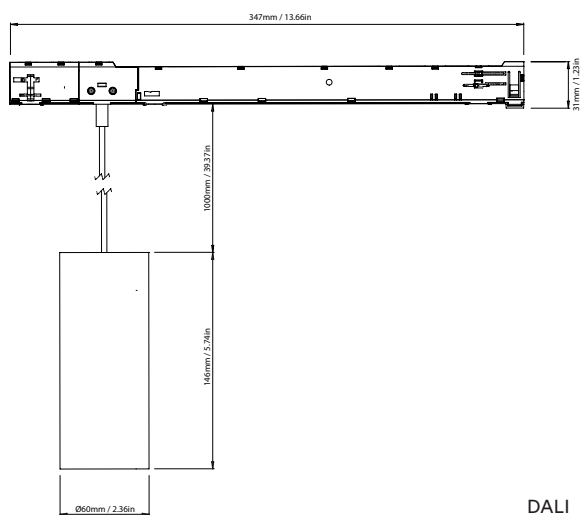

DALI

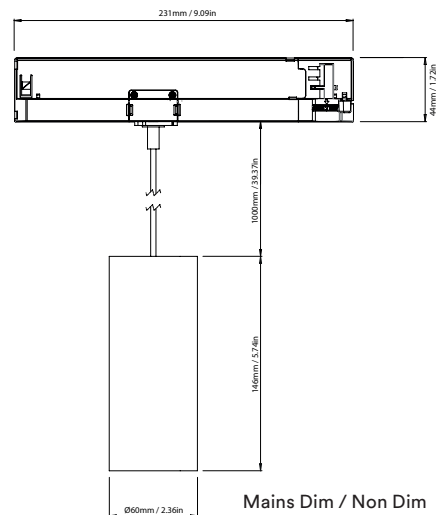

Mains Dim / Non Dim

circular product

erluna


cloud pendant for track 230v origin ultra output

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

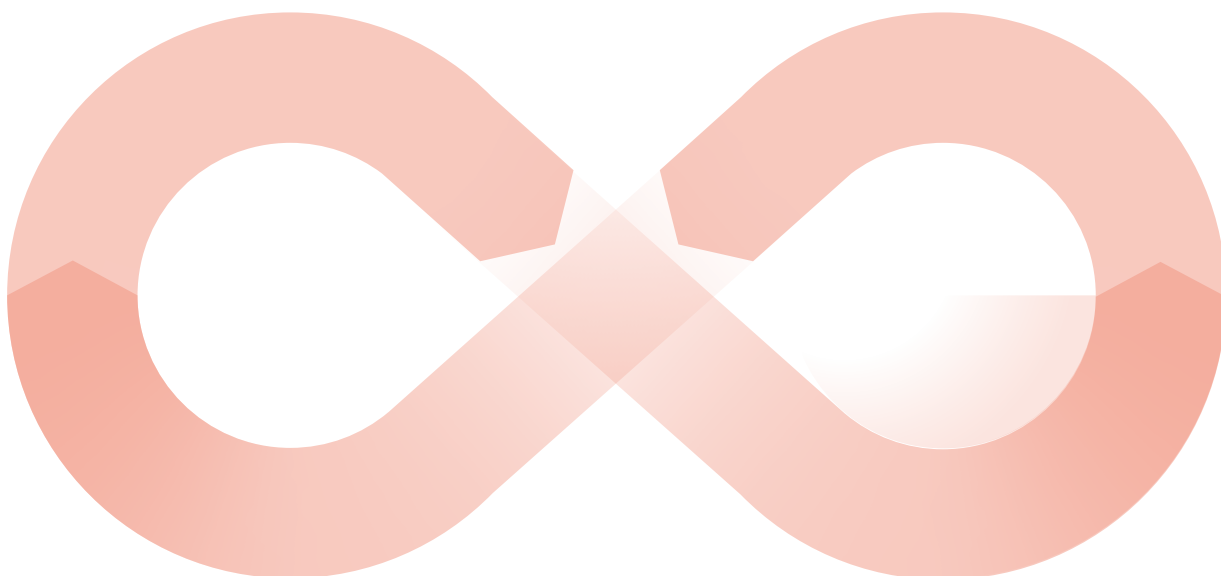

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



circular product

orluna

cloud pendant for track 230v origin ultra output

circular product

2700K										
LIGHT VALUES	SPOT			SOFT				SPECIALITY		
	Ultra	Spot	Compact	Narrow	Medium	Wide	Flood	Crisp	Linear	
	Beam Width FWHM	8°	10°	14°	20°	27°	34°	53°	34°	10x45°
	Initial Lumens	769	1218	1423	2190	2190	2190	2190	1624	1218
	Engine Lumens	272	453	497	1885	1925	1834	1912	1281	402
	Luminaire Lumens	269	399	476	1724	1704	1645	1615	1058	320
	Engine Lm/W	38	36	42	90	92	87	91	92	32
	Luminaire Cd	7908	9614	6816	10603	6758	4543	2568	2859	788
POWER	Voltage	36V	36V	34V	35V				35V	36V
	Drive Current	200mA	350mA	350mA	600mA				400mA	350mA
	Circuit Power (typ)	8.6W	14.2W	13.5W	23.6W				15.7W	14.2W

3000K										
LIGHT VALUES	SPOT			SOFT				SPECIALITY		
	Ultra	Spot	Compact	Narrow	Medium	Wide	Flood	Crisp	Linear	
	Beam Width FWHM	8°	10°	14°	20°	26°	34°	53°	33°	10x45°
	Initial Lumens	823	1308	1518	2326	2326	2326	2326	1725	1308
	Engine Lumens	291	483	527	1997	2032	1947	2018	1359	427
	Luminaire Lumens	287	438	508	1805	1794	1742	1704	1125	340
	Engine Lm/W	40	38	44	95	97	93	96	97	34
	Luminaire Cd	8925	11033	7340	11029	7288	4739	2753	3163	838
POWER	Voltage	36V	36V	34V	35V				35V	36V
	Drive Current	200mA	350mA	350mA	600mA				400mA	350mA
	Circuit Power (typ)	8.6W	14.2W	13.5W	23.6W				15.7W	14.2W

DRIVER	Binning SDCM (Hot) CRI (typ)(R9) TM30 Rf Rg Lifetime (TM21)									
	2 98 (99) Rf 93.8 Rg 101.9 L90 B5 50,000hrs (inc driver)									
DRIVER	Protocols Dim to Dark									
	Mains Dim / DALI / Non-dim 0.1% Lux									

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
OU	- PTW	- 27	D	M	- W	- BB	- 20 H
	PTW / White PTB / Black PTX / Other	27 / 2700K 30 / 3000K	D / DALI M / Mains Dim N / Non Dim	U / Ultra S / Spot P / Compact N / Narrow M / Medium W / Wide F / Flood C / Crisp L / Elliptical Linear	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL A / Black Anodised J / Antique Bronze G / Polished Brass K / Brushed Chrome L / Polished Chrome F / Satin Grey P / Brushed Brass Z / Other Metallic	BB / Black 9005 WB / White 9010 DB / White 9003 CB / Other RAL AB / Black Anodised JB / Antique Bronze MB / Polished Brass KB / Brushed Chrome LB / Polished Chrome FB / Satin Grey PB / Brushed Brass ZB / Other Metallic	20 / IP20 H / Honeycomb N / Frosted Lens