

erluna

one twin
lo pro

circular product






IP65
IP54



UK
CA

one twin
lo pro

circular product

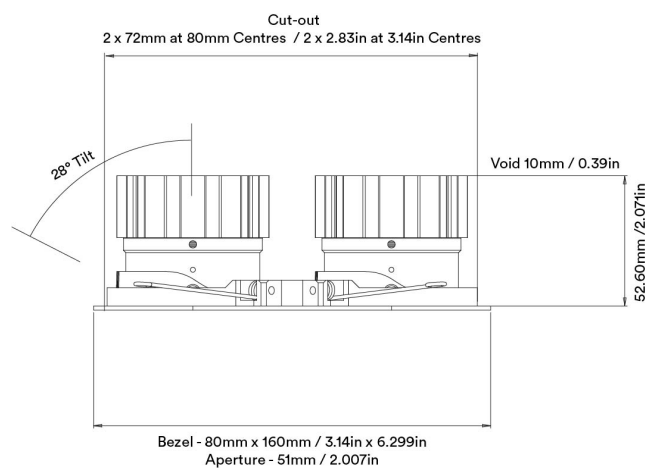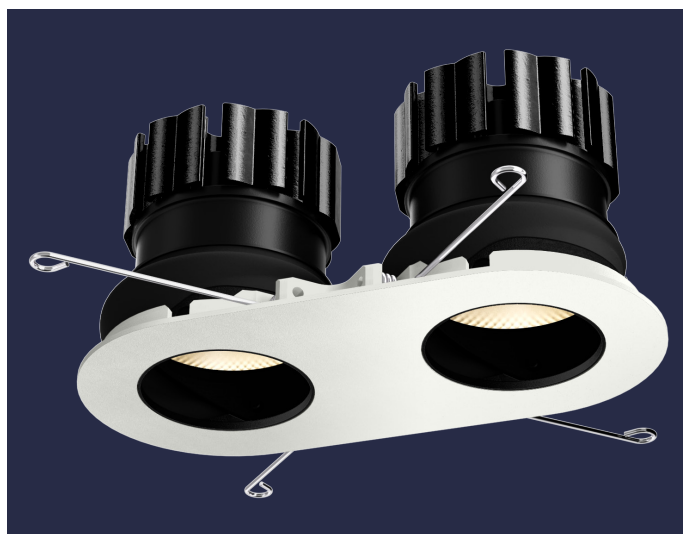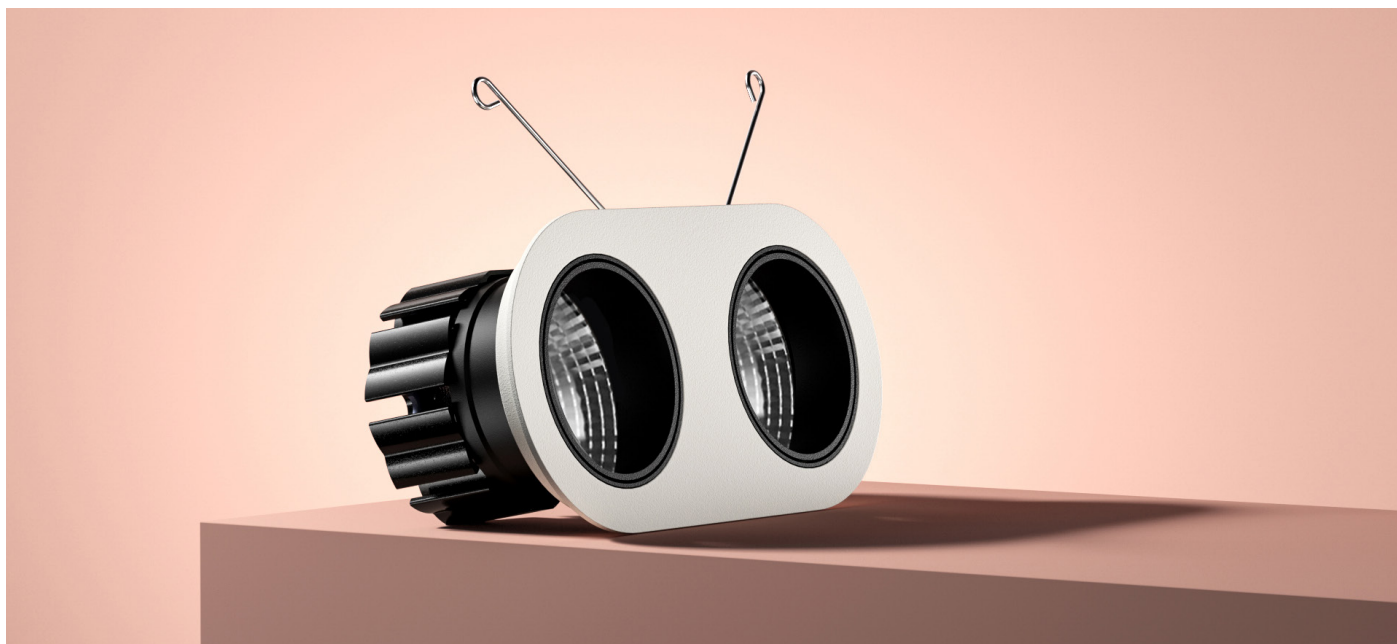

one twin lo pro

circular product

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2

20yr support

recycled

spares & repairs

renew

Don't throw me away.
If this light has reached the end of its life or is in need of repair, please get in touch: +44 (0) 1923 889712

		2700K		
		SOFT		
		Narrow	Medium	Wide
LIGHT VALUES	Beam Width FWHM	18°	19°	32°
	Initial Lumens	1164	1164	1164
	Engine Lumens	895	866	868
	Luminaire Lumens	645	636	603
	Engine Lm/W	79	76	76
	Luminaire Cd	4522	3344	1327
	POWER	Voltage	34V	
Drive Current		300mA		
Circuit Power (typ)		11.4W		

		3000K		
		SOFT		
LIGHT VALUES		Narrow	Medium	Wide
	Beam Width FWHM	18°	20°	33°
	Initial Lumens	1252	1252	1252
	Engine Lumens	913	905	903
	Luminaire Lumens	684	683	635
	Engine Lm/W	80	79	79
	Luminiare Cd	4665	3551	1397
	POWER	Voltage	34V	
Drive Current		300mA		
Circuit Power (typ)		11.4W		

DRIVER	Binning SDCM (Hot)	2
	CRI (typ)(R9)	98 (99)
	TM30 Rf Rg	Rf 93.8 Rg 100.9
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
	Lifetime (Calculated)	L70 426,000hrs
	Protocols	Mains Dim / DALI / 0-10V / Non-dim
	Dim to Dark	0.1% Lux
DRIVER	Distance from LED	20m / 65' (series wiring)
	Emergency	Emergency packs available

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
LO	-ONE2-	27	M	N	- W -	BB	F 54 E
		27 / 2700K 30 / 3000K	M / Mains Dim D / DALI O / 0-10v N / Non Dim X / No Driver	N / Narrow M / Medium W / Wide	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL V / Dark Bronze T / Medium Bronze R / Light Bronze Y / Burnished Brass G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic	WB / White RAL 9010 DB / White RAL 9003 BB / Black RAL 9005 CB / Other RAL VB / Dark Bronze TB / Medium Bronze RB / Light Bronze YB / Burnished Brass GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic	F / 60 min Fire Rated Hood 54 / IP54 65 / IP65 P / Sea & Spa IP65 T / Lockable Tilt & Rotate E / 3hr Emergency H / Honeycomb N / Frosted Lens Z / LSZH Cable K / Click Connector