

erluna

cuadro adjustable
origin
high efficiency

circular product




IP65
IP54



UK
CA

cuadro adjustable
origin high efficiency

circular product

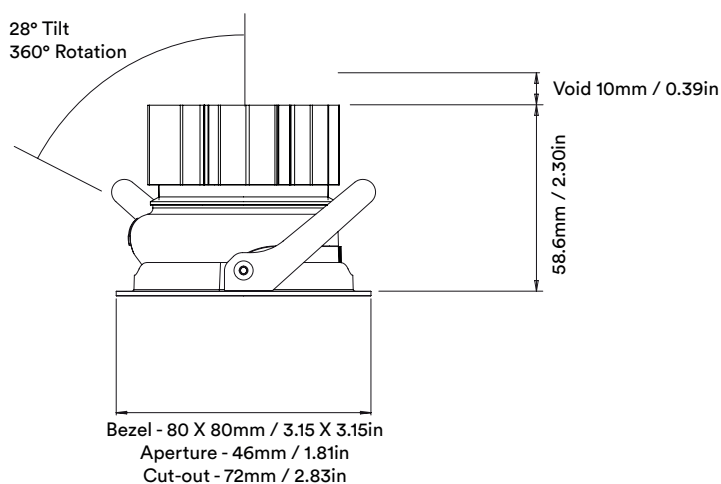

cuadro adjustable origin high efficiency

circular product

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.


3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2

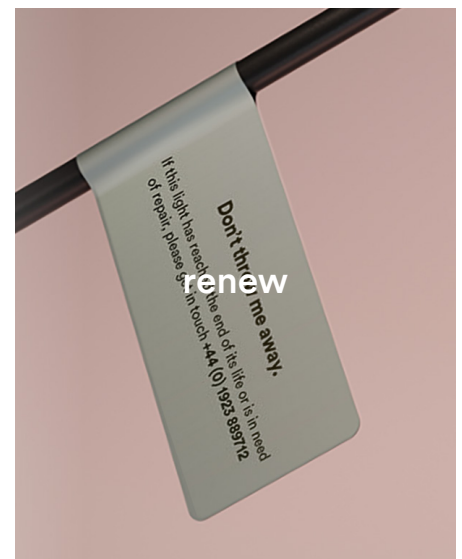

cuadro adjustable
origin high efficiency

circular product

		2700K			
		SOFT			
LIGHT VALUES		Narrow	Medium	Wide	Flood
	Beam Width FWHM	21°	27°	35°	48°
	Initial Lumens	890	890	890	890
	Engine Lumens	716	720	715	758
	Luminaire Lumens	588	548	612	470
	Engine Lm/W	83	84	83	88
POWER	Luminaire Cd	3398	2107	1658	838
	Voltage	34V			
	Drive Current	225mA			
Circuit Power (typ)		8.6W			

		3000K			
		SOFT			
LIGHT VALUES		Narrow	Medium	Wide	Flood
	Beam Width FWHM	22°	26°	35°	50°
	Initial Lumens	953	953	953	953
	Engine Lumens	762	766	769	806
	Luminaire Lumens	609	583	644	535
	Engine Lm/W	89	89	89	94
POWER	Luminaire Cd	3379	2237	1747	912
	Voltage	34V			
	Drive Current	225mA			
Circuit Power (typ)		8.6W			

DRIVER	Binning SDCM (Hot)	2
	CRI (typ)(R9)	98 (99)
	TM30 Rf Rg	Rf 93.8 Rg 101.9
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
	Lifetime (Calculated)	L70 426,000hrs
DRIVER	Protocols	Mains Dim / DALI / 0-10V / Non-dim
	Dim to Dark	0.1% Lux
	Distance from LED	20m / 65' (series wiring)
	Emergency	Emergency packs available

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
OE	-CDO-	27	M	M	- W -	BB	F 54 E
		27 / 2700K 30 / 3000K	M / Mains Dim D / DALI O / 0-10v N / Non Dim X / No Driver	N / Narrow M / Medium W / Wide F / Flood	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic	WB / White RAL 9010 DB / White RAL 9003 BB / Black RAL 9005 CB / Other RAL GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic	F / 60 min Fire Rated Plate 54 / IP54 65 / IP65 P / Sea & Spa IP65 *C / Constant Torsion T / Lockable Tilt & Rotate E / 3hr Emergency H / Honeycomb N / Frosted Lens Z / LSZH Cable K / Click Connector

*NOTE: Fire Hood if used with constant torsion springs