

erluna

curve recessed
fixed
warm dim

circular product





IP65
IP54



UK
CA

curve recessed fixed
warm dim

circular product

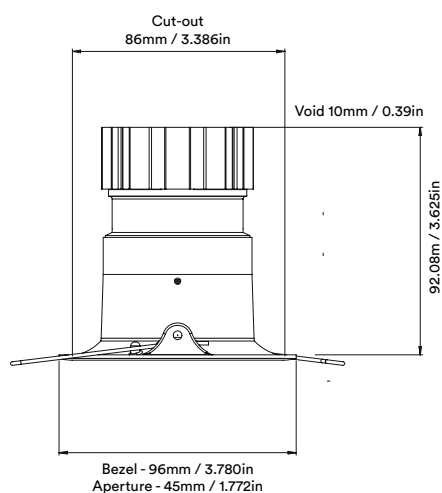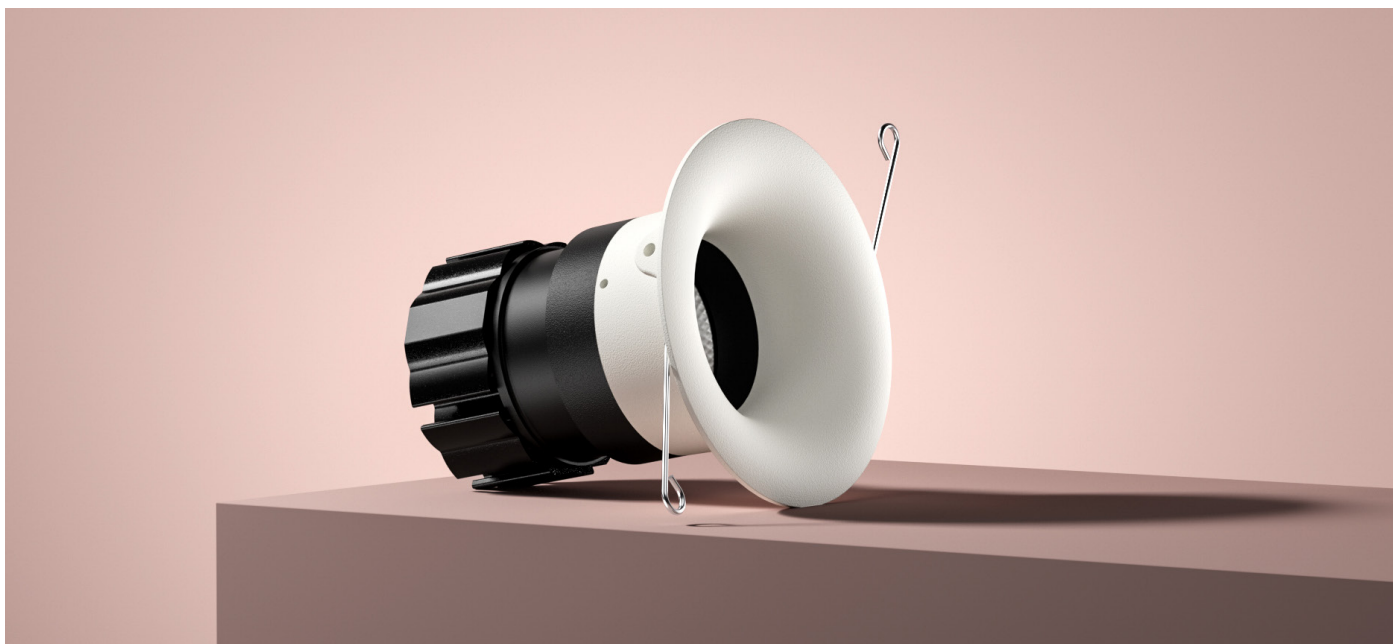

curve recessed fixed warm dim

circular product

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



curve recessed fixed
warm dim

circular product

		1800K - 3000K			
		SOFT			
LIGHT VALUES		Medium	Wide	Flood	Wash
	Beam Width FWHM	26°	40°	47°	54°
	Initial Lumens	1030	1030	1030	1030
	Engine Lumens	819	809	791	798
	Luminaire Lumens	505	516	508	465
	Engine Lm/W	71	70	68	69
POWER	Luminaire Cd	1676	995	779	539
	Voltage	34V			
	Drive Current	300mA			
		Circuit Power (typ)			
		11.6W			
DRIVER	Binning	SDCM (Hot)			
	CRI (typ)(R9)	3			
	TM30 Rf Rg	98 (98)			
	Lifetime (TM21)	Rf 94.1 Rg 101.9			
	Lifetime (Calculated)	L90 B5 50,000hrs (inc driver)			
		L70 426,000hrs			
DRIVER	Protocols	Mains Dim / DALI / 0-10V / Non-dim			
	Dim to Dark	0.1% Lux			
	Distance from LED	20m / 65' (series wiring)			
	Emergency	Emergency packs available			

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
WD	- CVRF -	WD	M	M	- W -	BB	- F 54 E
		WD / Warm Dim	M / Mains Dim D / DALI 0 / 0-10v X / No Driver	M / Medium W / Wide F / Flood H / Wash	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL	WB / White RAL 9010 DB / White RAL 9003 BB / Black RAL 9005 CB / Other RAL GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic	F / 60 min Fire Rated Plate 54 / IP54 65 / IP65 P / Sea & Spa IP65 H / Honeycomb N / Frosted Lens E / 3hr Emergency Z / LSZH Cable K / Click Connector