


cloud mini pendant for shallow trimless track 48v origin natural tuneable

circular product

cloud mini pendant
for shallow trimless track 48v
origin natural tuneable

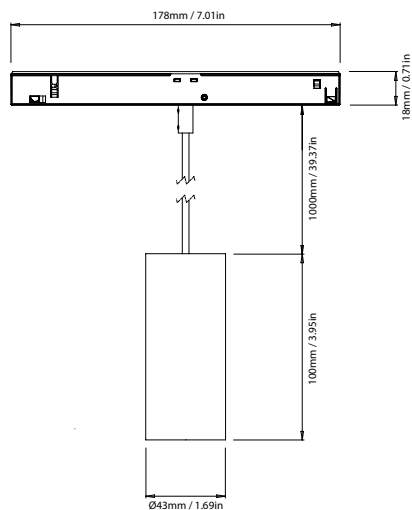

cloud mini pendant for shallow trimless track 48v origin natural tuneable

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.



2



circular product

orluna

cloud mini pendant for shallow trimless track 48v origin natural tuneable

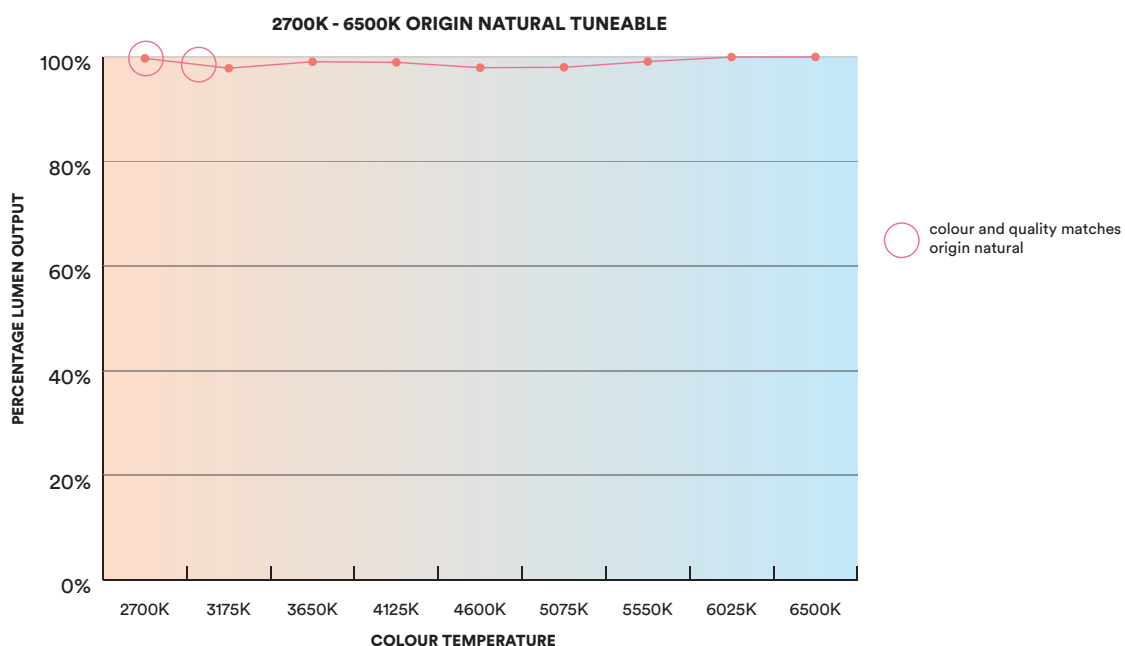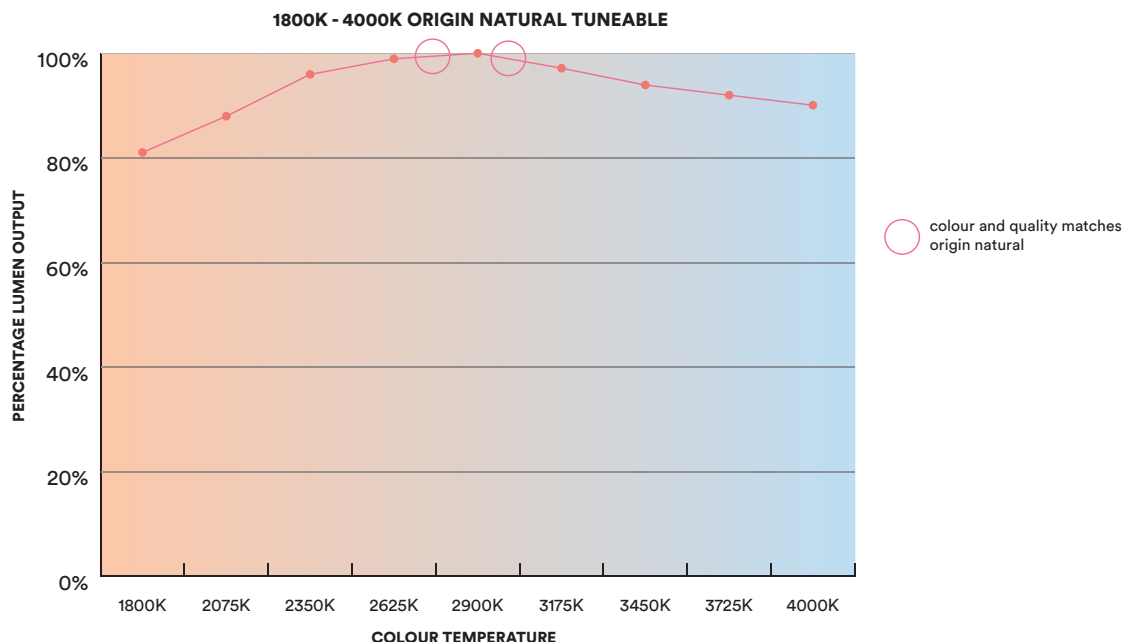

cloud mini pendant

for shallow trimless track 48v

origin natural tuneable

		1800 - 4000K			
		SOFT			
LIGHT VALUES		Narrow	Medium	Wide	Flood
	Beam Width FWHM	22°	28°	40°	49°
	Initial Lumens	510	510	510	510
	Engine Lumens	391	393	387	406
	Luminaire Lumens	302	333	316	317
	Engine Lm/W	70	70	69	72
	Luminiare Cd	1279	1102	640	484
POWER	Voltage	37.5V			
	Drive Current	200mA			
	Circuit Power (typ)	10.1 - 7.6W			

		2700 - 6500K			
		SOFT			
LIGHT VALUES		Narrow	Medium	Wide	Flood
	Beam Width FWHM	23°	28°	39°	50°
	Initial Lumens	548	548	548	548
	Engine Lumens	435	422	419	456
	Luminaire Lumens	336	358	342	356
	Engine Lm/W	69	67	67	73
	Luminiare Cd	1278	1200	751	539
POWER	Voltage	38V			
	Drive Current	200mA			
	Circuit Power (typ)	10.3 - 8.1W			

Binning	SDCM (Hot)	2
	CRI (typ)(R9)	98 (99)
	TM30 Rf Rg	Rf 97.7 Rg 100.4
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
	Lifetime (Calculated)	L70 426,000hrs
DRIVER	Protocols	DALI-2 DT8 (DT6 on request)
	Dim to Dark	0.1% Lux

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
NT	PMTSW	T1	D	M	W	BB	20 H
	PMTSW / White PMTSB / Black	T1 / 1800 - 4000K T2 / 2700 - 6500K	D / DALI	N / Narrow M / Medium W / Wide F / Flood	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL AB / Black Anodised AV / Bronze Anodised V / Dark Bronze T / Medium Bronze R / Light Bronze Y / Burnished Brass G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic	WB / White RAL 9010 DB / White RAL 9003 BB / Black RAL 9005 CB / Other RAL VB / Dark Bronze TB / Medium Bronze RB / Light Bronze YB / Burnished Brass GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic	20 / IP20 H / Honeycomb N / Frosted Lens